

GP3 TECHNICAL FILE

UNIVERSAL LOOP ANCHOR

Universal loop anchor for direct installation

PRODUCT REFERENCE

GP3-59247570


DOCUMENT TYPE

TECHNICAL DRAWING

DIMENSION UNIT

mm

DIMENSIONED PRODUCT DRAWING

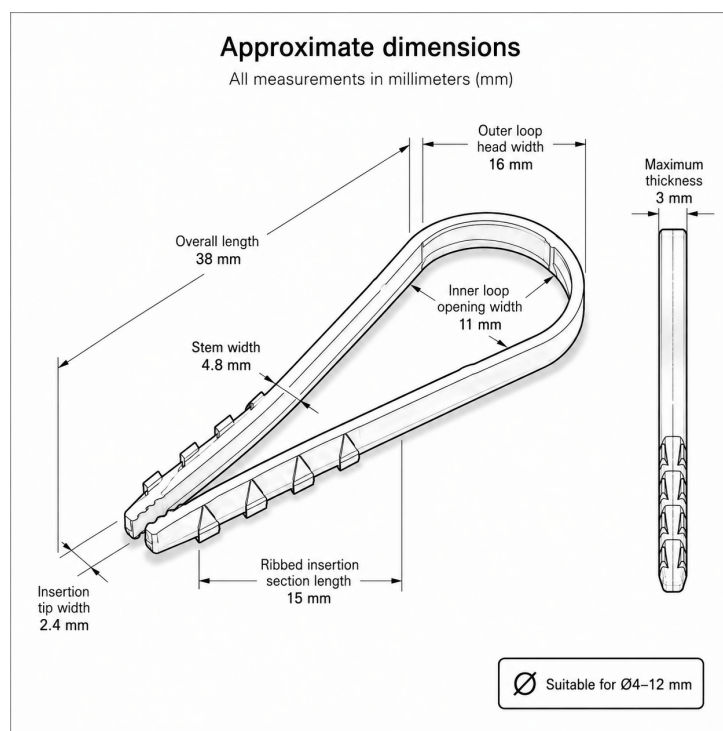

APPLICATION AND INSTALLATION

For direct installation of electrical wiring, cable routes, low-current lines and other engineering networks. Suitable for open routing and, where applicable, installation inside corrugated protective pipes.

Rapid installation: May be used with compatible engineering fastening guns or rapid-installation tools only when the fastener, plug/base and substrate are approved for that system. Follow the tool manufacturer's safety instructions.

Typical uses: power, communication, data, control and other engineering cable routes.

TECHNICAL DATA

Product	GP3-59247570
Product type	Universal loop anchor
Variant	Universal loop anchor for cable and engineering installations
Material	HDPE + reinforced engineering polymer blend
Colour	White (supplied reference image)
Key dimensions	L 38; outer loop W 16; inner opening W 11; stem W 4.8; ribbed insertion 15; tip W 2.4; max thickness 3; suitable Ø4-12
Mounting details	Dimensions and insertion geometry are shown on the supplied dimensioned product sketch
Weight	Not specified in supplied materials

Final material, compatibility and fastening conditions must be confirmed against the applicable GP3 production specification.